
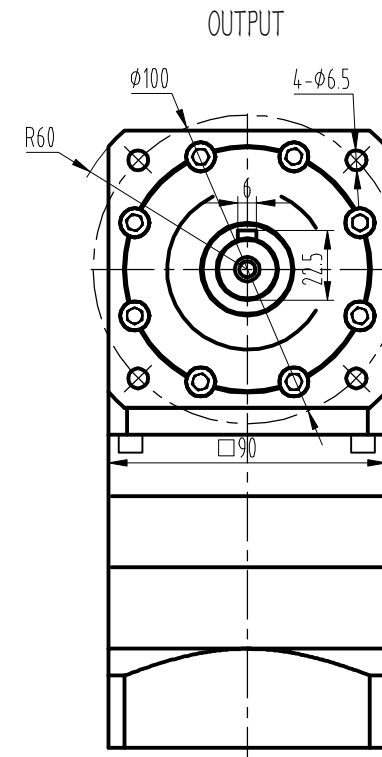


Temperature: -25 ℃~90 ℃
Maximum speed: 4500RPM
Service life: 20000h

ZAE090-L1-|| -20-002-YT-|| ||-XJG
x35/ø70x3/4-ø6.5-ø90

	Ratio	3	4	5	7	10
Rate torque NM		60	86	94.5	64	39.5
Max. torque NM		2 time rate torque				
Inertia Kgcm2		0.4	0.309	0.291	0.285	0.283
Radial load N		1020				
Axial load N		850				



1.

ZAE090-L1-||-S2-P2

SOPROLEC