
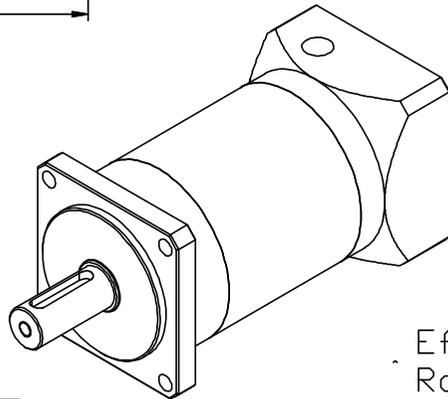


INPUT

OUTPUT

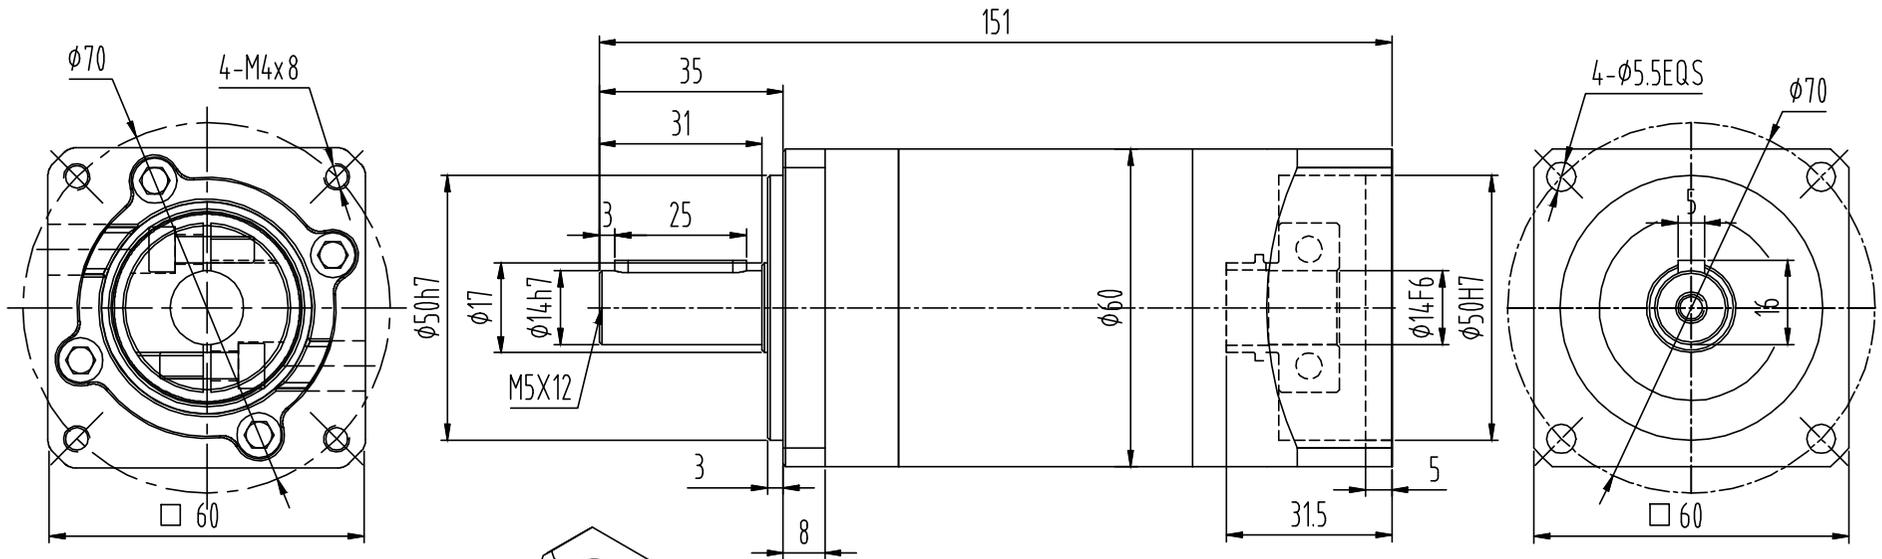


Efficiency: 92%
 Rated input speed: 3000RPM
 Lubrication: synthetic grease
 Service life: 20000h

Temperature: - 25 °C - 90 °C
 Maximum input speed: 6000RPM
 Backlash: 12 arcmin
 Protection grade: IP65

Ratio	i=
Sign	

Ratio	64	80	100	125	140	175	200	250	280	350
Rated torque NM	37.5	37.5	37.5	41	37.5	41	37.5	41	37.5	41
Max torque NM	2*Rated torque									
Inertia Kgcm ²	0.092	0.092	0.092	0.092	0.091	0.091	0.091	0.091	0.091	0.091
Allowable radial force N	670									
Allowable axial force N	550									



AE-060-L3

[]-S2-P2

